

QUICK START GUIDE


Bluetooth® 2.4G



FBK27C Air2

T-FSTYLER COLLECTION

WHAT'S IN THE BOX

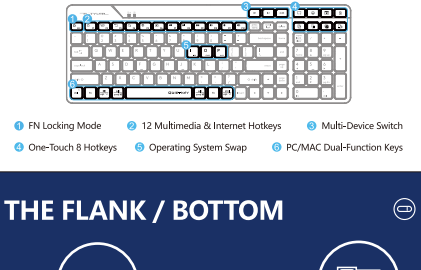

KNOW YOUR KEYBOARD



- 1 FN Locking Mode
- 2 One-Touch 8 Hotkeys
- 3 12 Multimedia & Internet Hotkeys
- 4 Operating System Swap
- 5 Multi-Device Switch
- 6 PC/MAC Dual-Function Keys

THE FLANK / BOTTOM




CONNECTING BLUETOOTH DEVICE 1 (For Mobile Phone/Tablet/Laptop)



- Short-press [F1] Bluetooth Device 1 Button and red light flashes slowly when pairing. (Re-Pairing: Long-press [F1] Bluetooth Device 1 Button for 3S)
- Choose [FBK27C AS] from your Bluetooth device. The indicator will be solid red for a while then light off after the keyboard is connected.

CONNECTING BLUETOOTH DEVICE 2 (For Mobile Phone/Tablet/Laptop)



- Short-press [F2] Bluetooth Device 2 Button and red light flashes slowly when pairing. (Re-Pairing: Long-press [F2] Bluetooth Device 2 Button for 3S)
- Choose [FBK27C AS] from your Bluetooth device. The indicator will be solid red for a while then light off after the keyboard is connected.

CONNECTING 2.4G DEVICE



- Plug the receiver into the computer's USB port.
- Use the Type-C adaptor to connect the receiver with the computer's Type-C port.
- Turn on the keyboard power switch. Short-press 2.4G button, the indicator will be solid red for a while then light off after the keyboard is connected.


OPERATING SYSTEM SWAP

Windows / Android is default system layout.

System	Shortcut [Long-Press for 3S]	Device / Layout Indicator
iOS	[fn] + [i os]	Light will be off after flashing.
Mac	[fn] + [o mac]	
Windows & Android	[fn] + [p w]	


Note: The layout you used last time will be remembered. You can switch the layout by following the above step.

INDICATOR (For Mobile Phone/Tablet/Laptop)



Indicator	Red Light	Red Light	Red Light
Multi-Device Switch	[2.4G]	[F1]	[F2]
Device Switch: Short-Press for 1S	Solid Light SS		
First Pair: Short Press 1S Re-Pair: Long Press 3S	Solid Light SS		Pairing: Flashes Slowly Connected: Solid Light 10S

ONE-TOUCH 8 HOTKEYS

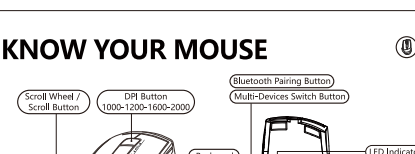

FN MULTIMEDIA KEY COMBINATION SWITCH

FN Mode: You can lock & unlock FN mode by short pressing FN + ESC by turn.

- Lock FN Mode: No need to press FN key
 - Unlock FN Mode: FN + ESC
- After pairing, FN shortcut is locked in FN mode by default, and the locking FN is memorized when switching and shutting down.



OTHER FN SHORTCUTS SWITCH

Shortcuts	Windows	Android	Mac / iOS
[fn] + [backspace]		Screen Lock	Screen Lock (iOS Only)
[fn] + [delete]		Pause	
[fn] + [up arrow]		Device Screen Brightness +	
[fn] + [down arrow]		Device Screen Brightness -	

Note: The final function refer to the actual system.

DUAL-FUNCTION KEY

Multi-System Layout

Keyboard Layout	Windows / Android (W / A)	Mac / iOS (mac / ios)
[fn] + [i os] [p w]	Switching Steps: ① Choose iOS layout by pressing FN+I ② Choose MAC layout by pressing FN+O ③ Choose Windows / Android layout by pressing FN+P.	
[fn] + [ctrl]	Ctrl	Control ^
[fn] + [opt]	Start	Option
[fn] + [alt]	Alt	Command
[fn] + [alt]	Alt-Right	Command
[fn] + [opt]	Ctrl-Right	Option

Q & A (For Keyboard)

Question How to switch layout under different system?
Answer You can switch layout by pressing FN + I / O / P under Windows | Android | Mac | iOS.

Question Does the layout can be remembered?
Answer The layout you used last time will be remembered.


Question How many devices can be connected?
Answer Interchange and connect up to 3 devices at the same time.

Question Does the keyboard remember the connected device?
Answer The device you connected last time will be remembered.


Question How can I know the current device is connected or not?
Answer When you turn on your device, the device indicator will be solid. (disconnected: SS, connected: 10S)

Question How to switch between connected Bluetooth device 1-2?
Answer By pressing the Bluetooth individual buttons ([F1] [F2]) at the keyboard's top right corner.

KNOW YOUR MOUSE

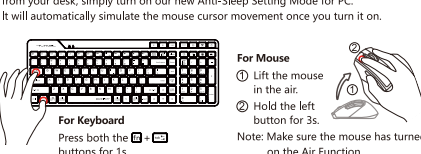


CONNECTING BLUETOOTH DEVICE 1 (For Mobile Phone/Tablet/Laptop)




- Short-press the Bluetooth button and choose Device 1. Indicator shows blue light for 5S.
- Long-press the Bluetooth button for 3S and red light flashes slowly when pairing.
- Turn on the Bluetooth of your device, search and locate the BT name on device: [FB45C Air2].
- After connection is established, the indicator will be solid blue for 10S then off automatically.

CONNECTING BLUETOOTH DEVICE 2 (For Mobile Phone/Tablet/Laptop)




- Short-press the Bluetooth button and choose Device 2. Indicator shows red light for 5S.
- Long-press the Bluetooth button for 3S and red light flashes slowly when pairing.
- Turn on the Bluetooth of your device, search and locate the BT name on device: [FB45C Air2].
- After connection is established, the indicator will be solid red for 10S then off automatically.

CONNECTING 2.4G DEVICE

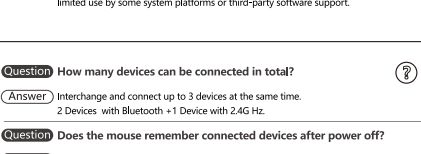

- Plug the receiver into the computer's USB port.
- Use the Type-C adaptor to connect the receiver with the computer's Type-C port.
- Turn on the mouse power switch, the indicator will flash red and blue for a while then light off after connected.

INDICATOR



Indicator	Red and Blue Light	Blue Light	Red Light
Switch Indicator: Short-Press 1S	Flashes Quickly 10S	Solid Light SS	Solid Light SS
Pair Device: Long-Press for 3S	No Need to Pair	Pairing: Flashes Slowly Connected: Solid Light 10S	Pairing: Flashes Slowly Connected: Solid Light 10S

The above indicator status is before Bluetooth paired. After the Bluetooth connection succeed, the light will turn off after 10S.

SCREENSHOT CAPTURES

Note: Supports Windows 10/11 or later.

- One click the capture button.
- Select the screenshot type by pressing the left key.
- Long press the left key and move the mouse cursor to capture the screen area.
- Release the left key and the screenshot will be recorded.
- You can paste the screenshot to another application.

[Desk + Air] DUAL FUNCTIONS

The innovative Air Mouse Function provides dual [Desk+Air] usage modes, turn your mouse into a multimedia controller by simply lift it in the air. No software installation required.

LIFT IN AIR FUNCTION

To activate the Air Function, please follow the steps:

- Lift the mouse in the air.
- Hold both left and right buttons for 5s.

So now you can operate the mouse in the air and turn it into a multimedia controller with the below functions.

- Left Button:** Anti-Sleep Setting Mode (Long Press 3S)
- Right Button:** Play / Pause
- Capture Button:** Open Browser*
- Scroll Wheel:** Volume Up / Down
- Scroll Wheel:** Mute
- DPI Button:** Open Media Player*
- Forward:** Previous Track
- Backward:** Next Track

* Supports Windows System Only

ANTI-SLEEP SETTING MODE

Note: Supports 2.4G Mode Only

To prevent your PC from entering the sleep-mode setting while you are away from your desk, simply turn on our new Anti-Sleep Setting Mode for PC. It will automatically simulate the mouse cursor movement once you turn it on.

- For Keyboard**
Press both the [Fn] + [Esc] buttons for 1s.
- For Mouse**
① Lift the mouse in the air.
② Hold the left button for 3s.
Note: Make sure the mouse has turned on the Air Function.

CHARGING & INDICATOR

Flashing Red light indicates when the battery is below 10%.

TECH SPEC

- Sensor:** Optical
- Buttons No.:** 7
- Resolution:** 1000-1200-1600-2000 DPI
- Style:** Right-Handed Fit
- Size:** 108 x 70 x 42 mm
- Weight:** 81 g
- Keypac:** Chocolate Style
- Keyboard Layout:** Win / Mac
- Character:** Laser Engraving
- Size:** 395 x 138 x 27 mm
- USB Extension Cable:** 100 cm
- Weight:** 414 g

- Connection:** Bluetooth / 2.4GHz
- Multi-Device:** Bluetooth x 2, 2.4G x 1
- Operation Range:** 5~10 m
- Report Rate:** 125 Hz
- Charging Time:** About 2.0 Hours
- Charging Cable:** 60 cm

Q & A (For Mouse)

Question Do I need to install software for the [Desk+Air] mouse function?
Answer Just lift the mouse in the air, and hold both left and right buttons for 5s to enable the "Lift in Air" function, to turn it into a multimedia controller.

Question Is the air function fully compatible with all multimedia platforms?
Answer The mouse air function is created according to the Microsoft operation instructions. Except for the volume control function, the other multimedia functions might be limited use by some system platforms or third-party software support.

Question How many devices can be connected in total?
Answer Interchange and connect up to 3 devices at the same time.
2 Devices with Bluetooth + 1 Device with 2.4G Hz.

Question Does the mouse remember connected devices after power off?
Answer The mouse will automatically remember and connect last device. You may switch the devices as you choose to.

Question How do I know what device is currently connected to?
Answer When the power is turned on, the indicator light will be displayed for 10S.

Question How to switch connected Bluetooth devices?
Answer Repeat the procedure of connecting Bluetooth devices.

WARNING STATEMENT

The following actions may/will cause damages to the product.

- In case of disassemble, bump, crush, or throw into the fire, you may cause irrefutable damages in event of the lithium battery leakage.
- Do not expose under the strong sunlight.
- Please obey all local laws when discarding the batteries, if possible please recycle them. Do not dispose of it as household garbage, it may cause a fire or an explosion.
- Please try to avoid charging in the environment below 0°C.
- Do not remove or replace the battery.
- Please use the charging cable included in the package to charge the product.
- Do not use any equipment with voltage exceeding 5V for charging.

www.a4tech.com

Scan for E-Manual